

DIGITAL INDICATOR

CY-60



OVERVIEW

The ASHE Series CY is a range of fully configurable micro-controller based universal Digital process Indicators with and without control relay outputs, offered in a highly compact, rugged and reliable execution. The instrument has three keys on the front panel, with which the operator can set the parameters and configure the instrument as desired. A four-digit LED display is offered on the front panel. The display can indicate any scale range between -999 to +9999 units.

The Indicators accept analog input signals like 4 to 20 mA DC and all temperature sensors like RTD Pt-100, Thermocouples (type J,K,R,S). The Indicator is available in several dimensions in panel-mount execution and operates on universal AC power supply.

The instrument can be provided with single/dual Relays for control action, the set-points of which may be set from the front keyboard. Options include On/Off and PID Control, multiple Relay outputs, Weather-proof / flame-proof executions, etc.

The Ashe CY range of Indicators offer a high degree of reliability owing to their inherent accuracy in process control, besides other characteristics like total immunity to shocks, dust, ambient temperatures, humidity and corrosive atmospheres. Further, the instruments are manufactured using selected high-grade components which guarantee their functional reliability and long operational life.

All ASHE range of Digital Indicators carry a lifetime warranty on design and workmanship.


SPECIFICATIONS

Model	ASHE CY-60
Type	Microcontroller based process indication on Digital display.
Input Signals / Sensors	4 to 20 mA DC and all temperature sensors like RTD Pt-100, Thermocouples type J,K,R,S.
Display	4-digit, 0.5" seven-segment LED display.
Scale Range	-999 to +9999.
Calibration	Configurable.
Response time	< 100 mS
Linearity	± 0.1% of span.
Calibration facility	By Membrane keypad on front panel.
Memory	Non-volatile.
Accuracy	± 0.1% of FSD.
Polarity	Auto-sensing.
Settings	Settings for Zero, Span, Decimal point.
Dimensions	48 x 96 x 55 mm [H x W x D].
Power Supply	90 to 270 V AC, 50 hz [Universal AC Power]. Optionally 24 V DC.
Execution	Panel mounting.
Enclosure	Industrial grade ABS.
Weight	Approximately 0.5 Kgs.
Operating Temperature	-10 to + 70°C.

FEATURES

- Microcontroller based design.
- Low cost, high functionality
- Standard analog signals and Temperature Sensors.
- Low Input impedance – negligible load on loop.
- High accuracy and linearity to input signal
- 4-digit seven-segment digital LED displays
- Very low power consumption and heat dissipation
- Fully configurable
- Selectable Temperature Sensors
- Temperature Linearization
- Universal AC SMPS or DC Power Supply
- Polarity Auto-sensing
- Selectable Decimal-point
- Rugged, industrial grade ABS enclosure
- High Noise immunity.
- Panel / Field / Hazardous-area installation in IP65 execution
- Proven record of several thousand installations
- Lifetime warranty on design and workmanship

DIMENSIONAL DIAGRAM

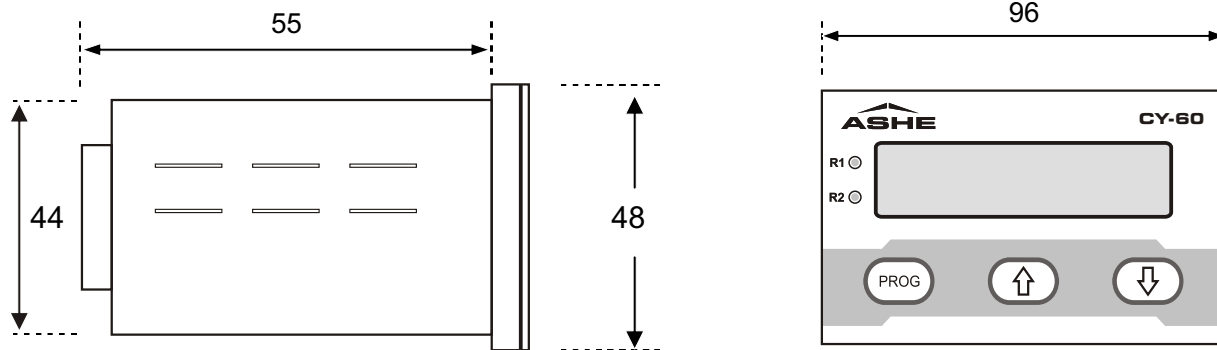

HOW TO ORDER

48 x 96 x 55mm.

CY-60

Configuration and Add-on options

1 INPUT SIGNALS

- ▶ 4 to 20 mA DC
- ▶ RTD Pt-100 (three-wire)
- ▶ J type Thermocouple (0 to 750 OC)
- ▶ K type Thermocouple (0 to 1200 OC)
- ▶ R type Thermocouple (0 to 1800 OC)
- ▶ S type Thermocouple (0 to 1800 OC)

L
R
J
K
P
S

2 POWER SUPPLY

- ▶ 90 to 270 V AC, 50 Hz ($\pm 10\%$).
Universal AC Power Supply.
- ▶ 24 V DC ($\pm 10\%$).
- ▶ Other (to be specified).

S
D
Z

3 EXECUTION

- ▶ Panel mounting [48 x 96 mm]
- ▶ Field mounting in Weather-proof execution
(Polycarbonate enclosure, IP65 protection)
- ▶ Field mounting in Flame/Explosion-proof execution
(Cast Aluminum Alloy LM6 enclosure, for Gas groups IIA, IIB)
- ▶ Other (to be specified)

C
W
X
Z

4 RETRANSMISSION

- ▶ No Retransmission

O

OUR OTHER PRODUCTS



PROCESS CONTROLLER

UNIVERSAL CONTROLLER

FLOW TOTALIZER

TEMP. SCANNER

SIGNAL ISOLATORS & TRANSDUCERS

SMPS POWER SUPPLIES



ASHE CONTROLS PRIVATE LIMITED

6/317, 318 & 319, Jogani Industrial Complex, Near ATI, Sion-Trombay Road, Chunabhatti (East), Mumbai - 400 022, India.
Phone / Fax : (022) 2405 1561, 2405 5791 • E-mail : sales@ashecontrols.com • Website: http://www.ashecontrols.com